

(19) 世界知的所有権機関  
国際事務局(43) 国際公開日  
2006年8月24日 (24.08.2006)

PCT


(10) 国際公開番号  
WO 2006/087839 A1

- (51) 国際特許分類: C08J 3/12 (2006.01) C08L 101/00 (2006.01)
- (21) 国際出願番号: PCT/JP2005/016047
- (22) 国際出願日: 2005年9月1日 (01.09.2005)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ: 特願2005-038474 2005年2月15日 (15.02.2005) JP
- (71) 出願人 (米国を除く全ての指定国について): 国立大学法人京都大学 (KYOTO UNIVERSITY) [JP/JP]; 〒6068501 京都府京都市左京区吉田本町3番地1 Kyoto (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 大野 工司 (OHNO, Kohji) [JP/JP]; 〒6110011 京都府宇治市五ヶ庄 国立大
- 学法人京都大学 化学研究所内 Kyoto (JP). 辻井 敬亘 (TSUJII, Yoshinobu) [JP/JP]; 〒6110011 京都府宇治市五ヶ庄 国立大学法人京都大学 化学研究所内 Kyoto (JP). 福田 猛 (FUKUDA, Takeshi) [JP/JP]; 〒6110011 京都府宇治市五ヶ庄 国立大学法人京都大学 化学研究所内 Kyoto (JP).
- (74) 代理人: 伊藤 温 (ITO, Atsushi); 〒1040033 東京都中央区新川2-1-1 進藤ビル2階 Tokyo (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[続葉有]

(54) Title: FINE HOLLOW PARTICLE WITH HIGH-DENSITY POLYMER BRUSH SHELL, PROCESS FOR PRODUCING THE SAME, AND APPLICATION OF FINE HOLLOW PARTICLE WITH HIGH-DENSITY POLYMER BRUSH SHELL

(54) 発明の名称: 高密度ポリマーブラシ被覆中空微粒子、その製造方法および高密度ポリマーブラシ被覆中空微粒子の応用

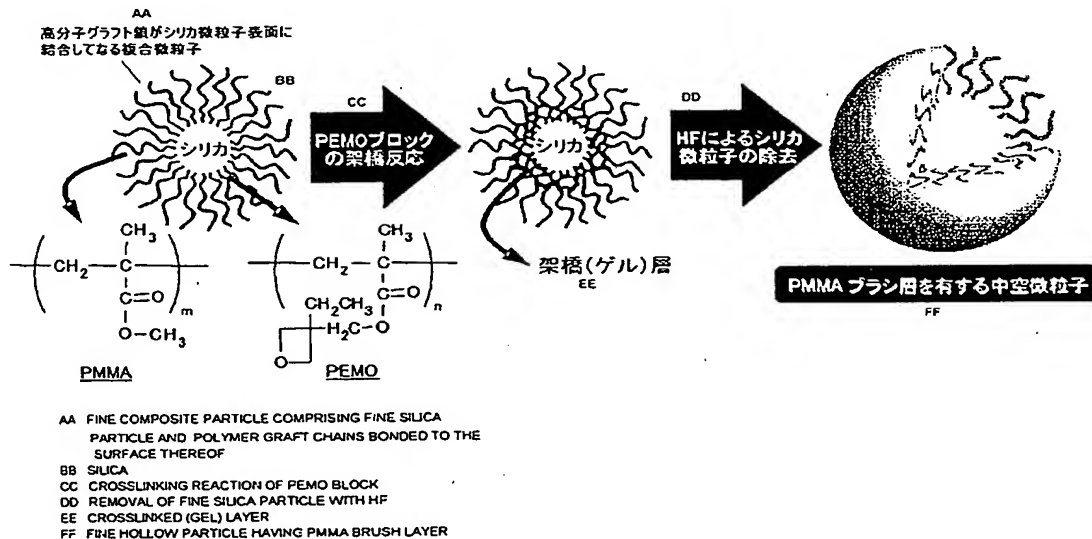

(57) Abstract: A method of hollowing fine composite particles each comprising a fine particle and high-density graft chains bonded to the surface thereof, without impairing such properties of the existing high-density polymer particles that they have a narrow particle diameter distribution and excellent dispersion stability; and fine hollow particles obtained by the method which each comprises a high-density polymer brush layer surrounding a hollow part. In the method, fine composite particles each comprising a fine particle and high-density graft chains bonded to the surface thereof are treated to dissolve away the fine particles only to thereby make the composite particles hollow. The fine hollow particles obtained by the method each comprises a high-density polymer brush layer surrounding a hollow part.

[続葉有]